
Combustion Pressure Sensors (For Measurement)

Part Name CAS-15A


Applications R&D support, measurement – M5 type, HEX4.0 type

[Outline Drawings]



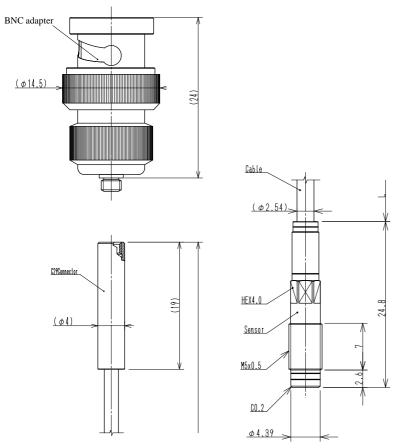


[Mounting Drawing (Example)]

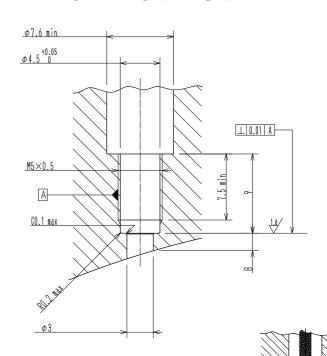

m)	Material
2	Steel
l Cast	iron,Aluminum Alloy
)

CAS-15A mounting example



Item	Details
Part No.	CAS-15A
Detectable pressure range	0~25 MPa (0~250bar)
Sensitivity	≒ -135pC/MPa (-13.5pC/bar)
Linearity %1)	≦±0.5%FSO
Response frequency range	>140kHz
Insulation resistance	≥10 ¹³ Ω(25°C)
Measuring temperature range at pressure-sensitive face	~350℃
Form of fastening (screw, hex)	M5×0.5mm、HEX4.0
Cooling	Non-Cooled
Cable, output terminal	Dedicated low-noise cable, BNC connector
Tightening torque	1.5N⋅m(Fastening to an aluminum block)

**1) Linearity (%FSO) is the maximum error allowable in the model specifications under standard operating conditions.


$$\pm Linearity(\%) = \frac{Max \triangle A}{A} \times 100$$

A=Value at the maximum pressure application indicated on the reference line

... The reference line is the line of sensor output values approximated using the least squares method at a given pressure.

 ΔA =The difference between the value on the output curve and the value on the reference line (output value - approximate value)

Max Δ A=The value on the output curve at the greatest divergence from the reference line, the maximum value of Δ A

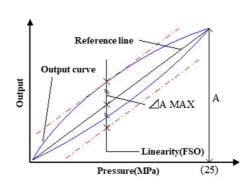

*2) The above applies to the sensing section only.

An adapter can be fitted for mounting.

Charge amplifiers adjusted for the output are available separately.

Please contact us for further information.

[Note] This product is subject to change without notice.

Inquiries

Sales Section, CPS Department, Kitamimaki Plant Tel: 0268-67-1808 Fax: 0268-67-1804 URL; http://cfd.citizen.co.jp